

# Eco Silent

# DC

Modern design combining performance with quality.

CFFCES32WH

White 48"  
No Light  
Remote



CFFCES32WHWC

White 48"  
No Light  
Wall Control



CFFCES32LWH

White 48"  
LED Light  
Remote



CFFCES33WH

White 52"  
No Light  
Remote




CFFCES33WHWC

White 52"  
No Light  
Wall Control



CFFCES33LWH

White 52"  
LED Light  
Remote

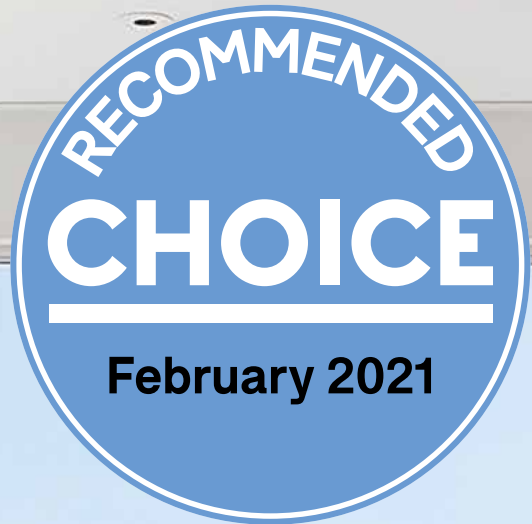

# Technical Data

Install Location:	Indoor
Motor Type:	DC
Blade Material:	Timber
Operation:	Wall Control   Remote

Remote frequency 2.4 GHz.

Reversible Remote:	Yes
Reversible Wall Control:	No
Ceiling Mount Angle:	0-15°
Blade Pitch:	13° (Approx)
Timer:	1-9 Hour

## About the CCT LED Light



3000k	4200k	5000k
1300 Lumens	1600 Lumens	1500 Lumens

Light Type:	LED (18w)
Dimmable:	Yes (8 Steps)

SP-CFFCESD-LEDMOD - User Replaceable LED Light Panel. Plug in LED panel can be replaced without an electrician.



LED Light has CCT & Dimming level memory, turn your fan off / on and the same light settings will be retained

## 48" Remote

Speed	Wattage	RPM	Airflow
1	3.6w	60	3,061 m3/hr
2	4.5w	90	4,253 m3/hr
3	6.7w	125	5,608 m3/hr
4	9.4w	161	6,997 m3/hr
5	14.1w	183	8,079 m3/hr
6	19.4w	215	9,601 m3/hr

## 52" Remote

Speed	Wattage	RPM	Airflow
1	5w	60	3,911 m3/hr
2	7w	90	5,242 m3/hr
3	10w	122	6,394 m3/hr
4	16w	151	7,454 m3/hr
5	25w	185	9,202 m3/hr
6	35w	215	11,060 m3/hr



## 48" Wall Control

Speed	Wattage	RPM	Airflow
1	4.7w	90	4,295 m3/hr
2	5.8w	116	4,986 m3/hr
3	8.4w	143	6,352 m3/hr
4	10.2w	162	7,021 m3/hr
5	15.4w	189	8,154 m3/hr
6	20.1w	215	9,601 m3/hr

## 52" Wall Control

Speed	Wattage	RPM	Airflow
1	7w	90	5,256 m3/hr
2	9.5w	115	6,156 m3/hr
3	13.5w	140	7,038 m3/hr
4	20.6w	165	8,473 m3/hr
5	26.2w	190	9,474 m3/hr
6	35w	215	11,060 m3/hr

## Dimensions

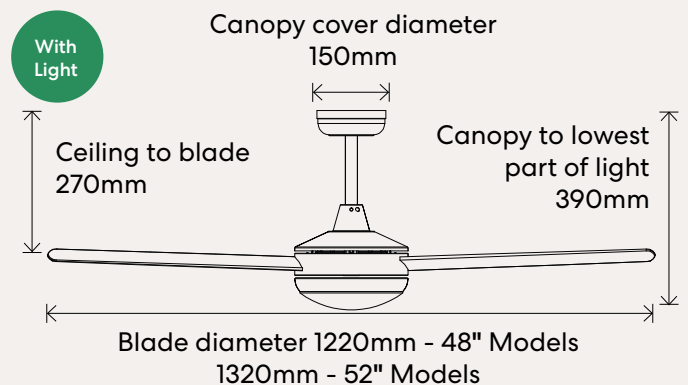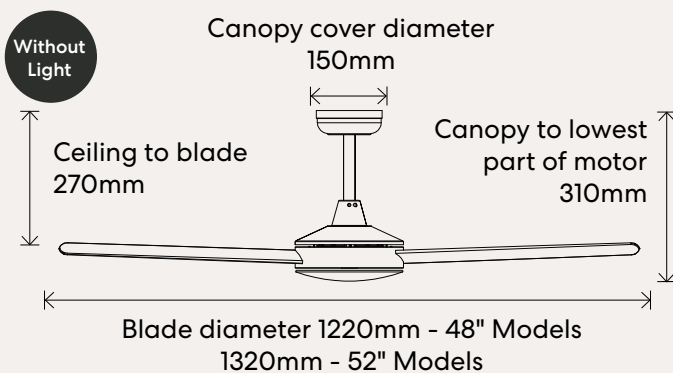

## Extension Rods

W-CRFCMK90WH  
White 900mm

W-CRFCMK90BL  
Black 900mm

W-CRFCMK150WH  
White 1500mm

W-CRFCMK150BL  
Black 1500mm